

MALETTI GROUP / UNIVERSITY OF PERUGIA: A COLLABORATION THAT LOOKS TO A 100% SAFE FUTURE

PROF. CATALDO ARCURI, PHD
DEPARTMENT OF EXPERIMENTAL MEDICINE,
SECTION OF ANATOMY, UNIVERSITY OF PERUGIA



When the coronavirus - Covid-19 pandemic began, we all shut ourselves down at home and sought out our own particular "survival" space.

We listened to the opinions of a thousand experts and asked ourselves what we would have done and said if we were in their shoes. And when I was asked to collaborate with Maletti Group, I thought it was very important to offer my scientific knowledge and skills so as to help improve the production process of a key company, while respecting the rules, people and work.

Prof. Cataldo Arcuri, PhD

We have been focused on well-being for 80 years: well-being is synonymous with health and safety.

During the 1990s, our Technology section produced the first "HIV control system" to sanitise combs, razors and brushes when AIDS appeared in our lives. When Covid-19 forced many businesses to close for a prolonged period, we decided that we needed to focus not only on business reopening, but particularly on a complete and 100% safe reopening. Our mission has always been a global vision of the problem and its consequent action so that next time a virus comes along, no one needs to be unprepared, let alone forced to reduce their work due to a lack of health safety. 100% SAFE is our vision of the future.

Danilo Maletti, president of Maletti Group

PROF. CATALDO ARCURI EXPLAINS THE CONCEPTS BEHIND THE 100%SAFE PROJECT.

1. COVID-19 presents a typical viral structure with a single RNA filament covered and protected by a protein shell.

Externally is an additional lipoprotein envelope.


The use of UVC is an extremely valid method in that it causes damage to the viral RNA, the structure that makes replication possible, causing its total inactivation so that it is no longer able to replicate.

- 2. The **UVC** rays act on all micro-organisms, albeit in a slightly different way. In particular, bacteria, viruses, moulds, yeasts and spores are inactivated and killed by UVC rays, which are therefore still the best and most effective technology for microbial purification of the air.
- 3. The virus travels through the atmosphere as droplets, or rather water droplets formed of infected individual's saliva that is released from the body through coughing or sneezing. These droplets tend to fall towards the floor. The same happens with bacteria. For this reason, collecting the potentially contaminated air from below is the best method as this also generates a flow that prevents or significantly slows down any deposit on the lowest surfaces, such as the floor. This method, along with the disinfecting of higher surfaces, for example work tops, ensures a significant reduction in the viral and bacterial load in the workplace.
- 4. The MALETTI GROUP SANITISER PRODUCTS line uses the action of germicidal UVC rays emitted by special Quartz lamps installed inside of them. Compared to the chemical solutions that are generally used to disinfect surfaces, the use of UVC technology guarantees the destruction of the genetic structure of bacteria and viruses and a deep and constant sanitising action when devices are in operation.



MALETTI GROUP HAS OBTAINED A MINISTERIAL AUTHORISATION FOR THE UVC TOTEM APPLIANCE Ministero della Salute AS A CLASS 1 MEDICAL DEVICE.



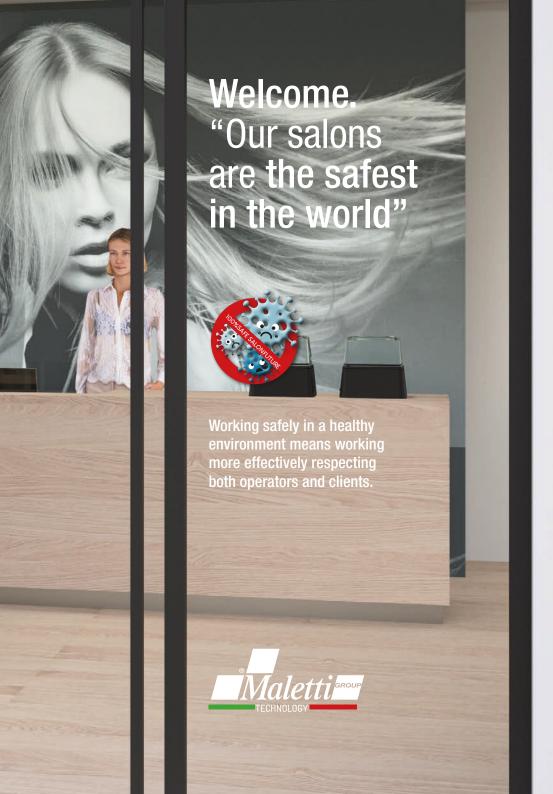

Salonfuture 100%safe: a totally safe pathway for operators and clients

The **FUTURE** presents too many unknowns for us so we indeed neet to adapt our domestic and work spaces

while considering two key points: greater safety = greater well-being greater safety = greater productivity Technology is a precious ally for a safe relaunch.

We have all learned how coronavirus transmission methods are insidious and how superficial gestures and behaviours need to be banned if we want to avoid facing any further lock down.

Thanks to the use of technology,
100%SAFE by Maletti Group guarantees
the continuous sanitisation of
spaces and accessories at
a level that no operator would be
able to ensure through manual
cleaning.

Only with the cooperation of both operators and clients safety can be 100% guaranteed.

1 RECEPTION

- disinfection of footwear
- temperature check
- clothing/bag storage
- sanitisation of small personal items



2 SANITISATION


- 24-hour sanitisation
- trolleys for tools sanitisation and sterilisation

3 CUT/BLOW DRY

- hairstylist protection
- the hairdryer reaches 120°C with subsequent sterilisation of the adjacent working space

4 WASH UNITS

- partitions between wash units
- client isolation using hoods
- possibility to apply colour at the washstation

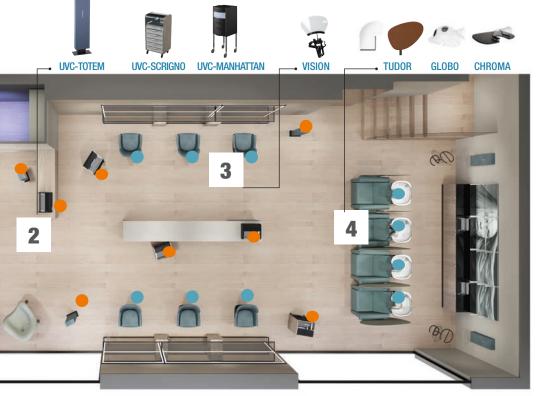





Sanitising station GOVNNONDESIGN

three in one: Station, Thermoscanner and Kubetto, the platform that sanitises footwear through atomising disinfectant liquid. (to be purchased separately)







THE FLOOR TO: PROF. ARCURI

AN ADDITIONAL BACTERIAL LOAD IS PRESENT ON CLOTHING STORING THEM IN A UVC RAY WARDROBE WILL PREVENT BACTERIA FROM FOLLOWING US INTO THE SALON

Alfred

Coats and bags are safely storaged-inside the sanitising wardrobe



The Alfred wardrobe is fitted with ozone-free UVC lamps which disinfect clothing and bags, essential in order to prevent viruses and bacteria following people inside the salon.

When the client leaves, any virus will have been eliminated. Produced upon request.





DISINFECTS COATS AND BAGS USING UVC LAMPS IN 30 MINUTES (THE MINIMUM TIME NEEDED FOR A BLOW-DRY)

AUTOMATIC PRESSURE SENSOR ACTIVATION

ACTIVATES ONCE CLOSED

LED LIGHTING

reception ______ 13



"Tudor M"

Available in transparent plexiglass or the full Maletti Group skay colour range.
It can also be installed on existing wash units.



SINGLE SELF-SUPPORTING PANEL CAN ALSO BE INSTALLED ON EXISTING WASH UNITS



"Tudor D"

Available in the full Maletti Group skay and wood colour ranges. Only for Nelson, Aluwash and Eden collection

THE BAR MUST BE FIXED TO THE INTERNAL STRUCTURE OF THE WASH UNIT



15



Chroma is a palette designed specifically for colour and various treatments.

A flat surface that can be easily positioned on all basins and easily disinfected. PALETTE IN HPL (HPL IS WATER/ HEAT/SCRETCH RESISTANT MATERIAL)



TRANSPARENT PLEXIGLASS VISOR FIXED WITH SCREWS



17

Globo

the head is **safe** from external agents



THE FLOOR TO: PROF. ARCURI

ENSURE EVERYONE ALWAYS
WEARS PERSONAL PROTECTIVE
EQUIPMENT IN THE SALON
AN ISOLATING HOOD
IS THE BEST WAY TO ENSURE

GREATER SAFETY

Globo is the hood with transparent plexiglass visor.

This visor is removable and open on top to facilitate the air passage. It can be used on several Maletti Group wash units and it allows simple relaxing isolation, even during colour application.

A PROTECTIVE VISOR PROTECTS CLIENTS BY EXTERNAL AGENTS. APPLIED BY SCREWS TO FACILITATE USE





Vision

the visor that **protects**, leaving glasses free and not fogged

PROTECTS THE STAFF FACE

CREATED IN ULTRA LIGHT
TRANSPARENT PET
ENSURES EXCELLENT VISUAL QUALITY
PREVENTS THE FOGGING OF EYEGLASS
LENSES.



Vision is the ideal face protection visor for a safe relaunch.


It offers excellent impact resistance thanks to its innovation, shield-like design.

Allows for full protection of the chin and forehead thanks to its distance from the operator's face.

Sweat proof, hypo-allergenic and non-toxic.

Can be used for long periods of time without causing irritation.

A SAFE, LIGHTWEIGHT, SWEAT PROOF SHOULDER STRAP PREVENTS CONTACT WITH THE SKIN OF THE FACE WHILE ENSURING FREEDOM OF MOVEMENT

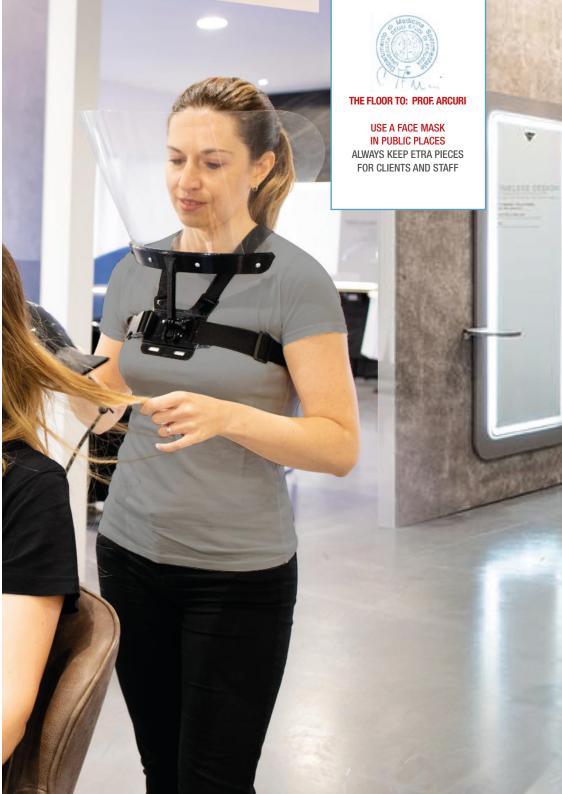



GIOVANIONIDESIGNI

Class 1 Medical Device certification from the Ministry of Health



Ministero della Salute ____ (SEE PAGE 43)

Purchasers of a Class 1 medical device have the right to a tax deduction for medical expenses. UVC-TOTEM is an air purification system. Essential in the salon of the future in order to keep workspaces sanitised 24 hours a day. Allows 120 m³/h sanitisation. It is not harmful to people. The universal: the only room sanitiser with customisable logos, colours and filters.

100/MADE



INFECTED DROPLETS TEND TO FALL
TOWARDS THE GROUND
COLLECTING CONTAMINATED AIR
FROM BELOW IS THE BEST ACTION
PLAN FOR DEEP
AND SAFE SANITISATION





AVAILABLE IN THE ENTIRE MALETTI GROUP SKAY AND WOOD COLOUR RANGES



sanitisation ______ 23

UVC-Mini Totem

The **mobile** sanitiser Very handy and easy to use



WALL UVC-MINI TOTEM (ALREADY PREDISPOSED FOR WALL FIXING)



UVC-Mini Totem

is the essential air purifier for lifts, treatment rooms and changing rooms. Keeps small spaces sanitised 24 hours a day.
Allows 30 m³/h sanitisation.
Not harmful to people.
Only with a steel finish.



SAFE FOR PEOPLE



100° DESIGN

EMISSION OF PURE AIR


The treated air is expelled from the exit nozzle (passing through the second optional filter), thus lowering the microbial load

INTERNAL SANITISATION


2 UVC lamps produce irradiation for maximum germicidal action

POLLUTED AIR INTAKE

aspirates polluted air from below by using fans

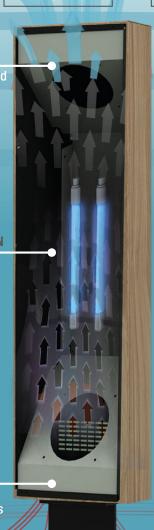

- The aspirated air from the below by UVC-Totem passes through the grille in the intake mouth, which blocks larger pollutants and preserves the integrity of the lamps.
- 2. The air enters the irradiation chamber in direct contact with two mercury steam pipes which, thanks to the emission of UVC radiation, determine the germicidal action.
- 3. The air is expelled through the outlet mouth it has passed through a second optional filter and expands circularly in the space, falling in an umbrella shape and thus reducing the microbial load.
- 4. Continuous disinfection also in the presence of people.
- 5. Constant 24 hr protection.
- 6. Low energy consumption.

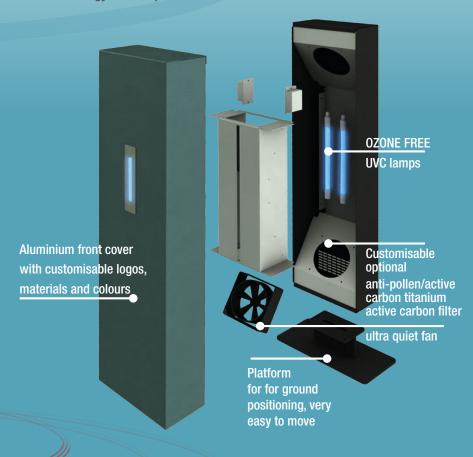

Problem? Polluting agents, viruses, bacteria and micro-particles

A series of pollutants are present in every professional and domestic environment.





PM 0,1 Ultra-fine particles and viruses



PM 5,0 Moulds and bacteria



SMELL Domestic smoke



PM 10
Pollens and allergens

Solution: three purifying optional filters

Maletti Group has identified three filters based on your needs

A / ANTI-POLLEN FILTER



Polyester filter cell.

Typically used to purify air and reduce fine PM10 and PM2.5 dusts and pollens.

These filter elements include comprise pleated polyester panels (filtering surface equal to 0.15mg).

The filter should be checked every 6 months or sooner if there is a significant drop in outgoing air flow rate from UVC-Totem.

The filter can be restored several times following the correct sanitising procedure.

B / ACTIVE CARBON FILTER



Active carbon filter cell.

Typically used for the deodorisation and chemical/physical absorption of gas pollutants (odours, solvents, etc.)

These filter elements include polyester pleated panels impregnated with active carbons (filtering surface equal to 0.15mg).

The filter should be checked every 6 months or sooner if there is a significant drop in outgoing air flow rate from UVC-Totem.

The filter should be replaced every 12 months due to a natural deterioration of carbon absorption ability..

C / ACTIVE CARBON FILTER TREATED WITH TIO2 TITANIUM DIOXIDE



Multi-layer filter cell (active carbon with film coating in titanium dioxide). Filters are composed of a non-woven fabric multi-layer that includes a middle layer made up of high-efficiency active carbon micro-spheres, to which a Ti02 titanium dioxide-based coating is applied externally. Typically used for the deodorisation and chemical/physical absorption of gas pollutants (odours, solvents, etc.) in combination with UVC ray exposure that boosts purification efficiency (BACTERIA, VIRUSES, YEASTS, MOULDS). These multi-layer filter elements include s polyester pleated panels impregnated with active carbons and with a film coating in titanium dioxide (filtering surface equal to 0.15mg). The titanium dioxide, activated by UV rays of suitable wavelength (254nm), catalyses the oxide reduction reactions of the organic substances absorbed on its surface: composts of organic origin are therefore broken down and H2O and CO2 are obtained as by-products.

The filter should be checked every 6 months or sooner if there is a significant drop in outgoing air flow rate from UVC-Totem. The filter should be replaced every 12 months due to a natural deterioration of carbon absorption ability.

sanitisation ______ 2



the sterilising trolley that protects your precious work tools



UVC-Scrigno box

GIOVANNONIDESIGN

UVC-Scrigno

COUNTERTOP ONLY BLACK ONLY

SANITISATION BY UVC RAY IRRADIATION (SEE PAGE 47)

LED LIGHTING WITH PLUG

LAMINATED WOODEN SIDES FROM THE MALETTI GROUP COLOUR RANGE

DOOR MADE OF TRANSPARENT METHACRYLATE FOR UVC PROTECTION



STRUCTURE MADE OF SATIN STEEL





5 DRAWERS

SIDES AVAILABLE IN ALL WOOD SHADES BELONGING TO MALETTI GROUP CHART

SPEEDY WHEELS



UVC-Manhattan

the newest arrival in the **Manhattan family**

The latest evolution, UVC-Manhattan trolley is a new entry in the Manhattan family. It includes a UVC ray drawer for tools sanitisation.

SANITISATION BY UVC RAY IRRADIATION (SEE PAGE 47)

UVC DRAWER WITH LED THAT ACTIVATES ONCE CLOSED AND TURNS OFF WHEN OPENED

GONZALES WHEELS







THE FLOOR TO: PROF. ARCURI

WASHING HANDS REGULARLY AND DISINFECTING THE MORE USED OBJECTS.

PROTECTS US FROM INFECTION.

IT SANITISES BY ATOMISING THE DISINFECTANT LIQUID LABORATORY TESTS HAVE UNDERLINED THE EFFECTIVENESS IN REDUCING THE **BACTERIAL LOAD BY 99.9%** THE TESTS WERE CARRIED OUT USING QUATERNARY SALTS AT A CONCENTRATION OF 1% (SEE PAGE 45)

0.5 LT TANK CAPACITY

LED LIGHTING

MANUAL FILLING OF DISINFECTANT LIQUID

IT DISINFECTS INSERTED ITEMS IN JUST A FEW SECONDS

> INTERCHANGEABLE PLEXIGLASS SHELL







PERFORATED GRID FOR THE OUTFLOW OF ATOMISED DISINFECTANT LIQUID



TIMED MANUAL ACTIVATION





UVC-Hot Caby

UVC ray steriliser

DISINFECTION TECHNOLOGY WITH COLD UVC RAYS AND HOT GERMICIDE UVC LAMPS

ALLOWS TOOLS AND CLOTHING DISINFECTION

TOWEL GRID

DOUBLE SWITCH TO SELECT THE DISINFECTION FUNCTION DEPENDING ON MATERIAL

DEVICE FOR STORAGE
OF SMALL TOWELS AND TOOLS
IN A PROTECTED ENVIRONMENT

AVAILABLE IN 3 VERSIONS

HOT CABY **SMALL**

HOT CABY **MEDIUM**

HOT CABY BIG







DOUBLE SWITCH



GERMICIDE UVC LAMPS



TOWEL GRILLE



sanitisation _____ 37

Autoklave

saturated steam steriliser

PRODUCT CERTIFIED FOR MEDICAL USE

ALLOWS STERILISATION OF UNPACKAGED METAL TOOLS SUCH AS SCISSORS, BLADES AND RAZORS ALLOWS SANITISATION OF TOWELS AT TEMPERATURES ABOVE 120°C

STERILISATION IS CARRIED OUT USING PRESSURISED SATURATED STEAM

THE STEAM ACTION
IRREVERSIBLY DAMAGES MICRO-ORGANISMS



PRESSURE GAUGE



Steryl Seal

sterile sealing

PRODUCT CERTIFIED FOR MEDICAL USE

IT ALLOWS THE PROTECTIVE PACKAGING OF PREVIOUSLY STERILISED AND/OR DISINFECTED TOOLS

VERSATILE ROLL HOLDER FOR BAGS OF VARIOUS SIZES

CREATED WITH MATERIALS THAT ENSURE THE HYGIENE OF THE PACKAGED PRODUCT

PERFECTLY SEALED PACKAGES ENSURE PRODUCTS TO BE PROTECTED FROM EXTERNAL CONTAMINATION

ROLLS RESISTANT TO STERILISATION PROCESSES



CUTTING AND SEALING



sanitisation ______ **39**

Ecosteam

100° natural steam steriliser



ALLOWS RAPID STERILISATION
USING THE NATURAL DISINFECTION OF 100°C STEAM

CAN BE USED ON SURFACES AND ITEMS
THAT CANNOT BE TREATED WITH CHEMICAL PRODUCTS

IDEAL FOR DISINFECTING A WORKSTATION AFTER EVERY TREATMENT

DOES NOT USE CHEMICAL PRODUCTS

DOES NOT CREATE RESIDUES

EXTREMELY EASY TO HANDLE AND USE



STEAM EMISSION






UVC-TOTEM

ROOM SANITISER

GIOVANNONIDESIGN

UVC-TOTEM 2 / 2 LAMPS **6094**UVC-TOTEM WOOD 2 / 2 LAMPS **6096PL**

WALL INSTALLATION KIT OPTIONAL 6093



Dimensions wall-mounted 197,7 cm $\!$	Lamps High-performance OZONE FREE selective 2 UVC lamps in pure quartz (emission peak of 254 nm)	TMC reduction total microbial load 99%		
Lamp life 6000 h	Emission wavelength 254 nm	Coverage 48 m²/h 120 m³/h		
Power supply 220v or 110v electrical absorption 50 watt	Starting sanification time 1h			

ARTICLE CODE	COLOUR	COMPATIBILITY
6094	Maletti all skay range	universal
6096	Maletti all wood range	universal



UVC-TOTEM IS A CLASS 1 MEDICAL DEVICE.


MALETTI GROUP HAS CHOSEN TO OBTAIN A MINISTERIAL AUTHORISATION FOR THE TOTEM UVC APPLIANCE AS A CLASS 1 MEDICAL DEVICE, WHICH, APPLYING A SERIES OF REGULATIONS WILL GUARANTEE THE PRODUCT ON THE EUROPEAN MARKET.

UVC-MINI TOTEM 6092 ROOM

SANITISER


UVC-MINI TOTEM 6092

ALREADY PREDISPOSED FOR WALL FIXING




Dimensions wall-mounted 143,1 cm \nearrow 5,25cm \rightarrow 12,4 cm with stand 147,9 cm \nearrow 5,25 cm \rightarrow 15,4 cm	Lamps High-performance OZONE FREE selective 1 UVC lamp in pure quartz (emission peak of 254 nm)	TMC reduction total microbial load 99%		
Lamp life 6000 h	Emission wavelength 254 nm	Coverage 12 m²/h 30 m³/h		
Power supply 220V or 110V Electrical absorption 25 watts	Starting sanification time 1h	Consumption 50W		

ARTICLE CODE	COLOUR	COMPATIBILITY			
6092	steel grey	universal			

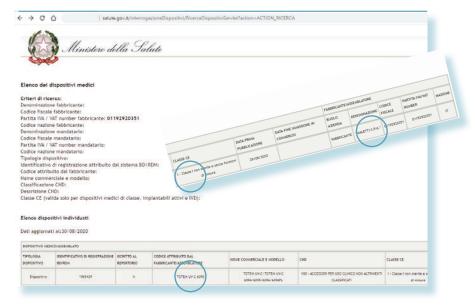

BLOCK 6089

STERILISER FOR SMALL ITEMS





Dimensions

1273 cm ≥230 cm →291 cm

Sanitises with the atomising of disinfectant liquid

TMC reduction total microbial load 99% Recommended treatment time 1 min. e 20 sec.

Power supply 220v or 110v Electrical absorption 60 watts

6089

Operating light Timed manual activation

grey / black

OPTIONAL cover in different sizes

universal

60W

ARTICLE CODE COLOUR COMPATIBILITY

KUBETTO FOOTWEAR SANITISING PLATFORM 6070 415 415 Dimensions Activator with body presence sensor TMC reduction 114,2 cm ≥41,5 cm →41,5 cm Perforated platform for the outflow total microbial load 99% of atomized disinfectant liquid Recommended treatment time 30 sec Power supply 220v or110v Operating light Consumption

ARTICLE CODE	COLOUR	COMPATIBILITY
6070	black	universal

Electrical absorption 60 watts

TESTS FOR BLOCK E KUBETTO

EXTERNAL LABORATORY TESTS HAVE UNDERLINED THE EFFECTIVENESS IN KILLING 99.9% OF THE BACTERIAL LOAD (CONTAMINATION WITH TWO TYPES OF BACTERIA: E.COLI AND S.AUREUS)

THE TESTS WERE CARRIED OUT USING THE PRODUCT RECOMMENDED IN THE MANUAL (QUATERNARY SALTS) AT A CONCENTRATION OF 1%

ECOLOGIA

Direttore del Laboratorio Responsabile Settori Microbiologia ed Allergeni (Biologo)



MODENA CENTRO PROVE s.r.l.

MODENA CENTRO PROVE S.F.I.

Sede legale e Laboratori: 41123 Modena (Italy) - Via Sallustio, 78

Tel. 059822417 r.a. - Fax 059380281 - e-mail: info@modenacentroprove.it - www.modenacentropro
C.C.I.A.A. Modena n. 228587 - Tribunale di Modena n° 2231 - C.F. e P. IVA n. 0159202036-

CERAMICA

A

MECCANICA

RISULTATI

I risultati ottenuti sono riassunti nelle due tabelle sottostanti. Per entrambe le superfici in seguito ad un trattamento di 2 minuti la percentuale di abbattimento (R%) ottenuta è stata del 99,9% o superiore (>99,9%).

PLASTICA (num. RdP 20LA05633 - laboratorio BIOKIM)

CEPPO	TESTIMONE	Campione dopo trattamento di 45 secondi (ufc/provino)	R%	Campione dopo trattamento di 1 minuto e 20 secondi (ufc/provino)	R%	Campione dopo tratamento di 2 minuti (ulciprovino)	R%	METODO
Escherichia coli ATCC 8739	3,6 ×10*	Presenti <40	99,9	<10	>99,9	<10	>99,9	ISO 16649-2:2001
Staphylococcus aureus ATCC 6538	2,9 x10 ⁴	2,9×10 ³	90	6,5 ×10°	97,8	<10	>99,9	UNI EN ISO 6888-1:2018


ACCIAIO (num. RdP 20LA05634 - laboratorio BIOKIM)

СЕРРО	TESTIMONE	Campione dopo trattamento di 45 secondi (ufciprovino)	R%	Campione dopo trattamento di 1 minuto e 20 secondi (ufc/provino)	R%	Campione dopo trattamento di 2 minuti (ufciprovino)	R%	МЕТОРО
Escherichia coli ATCC 8739	1,4 x10 ⁶	1,0 x102	>99,9	<10	>99,9	<10	>99,9	ISO 16649-2:2001
Staphylococcus aureus ATCC 6538	1,2 x10 ⁶	3,7 x104	69,2	6,5 x10 ²	99,5	1,6 x102	99,9	UNI EN ISO 6888-1:2018

UVC-SCRIGNO 6097

COUNTERTOP STERILISER

GIOVANNONIDESIGN





Dimensions

128 cm ≥36,4 cm →44,1 cm

OZONE FREE selective UVC lamps

TMC reduction total microbial load 99% Recommended treatment time 5 mins.

Power supply 220v or 110v Electrical absorption 25 watts


ARTICLE CODE	COLOUR	COMPATIBILITY
6097	black	universal

UVC-SCRIGNO BOX COMPOSITE

STERILISING TROLLEY

GIOVANNONIDESIGN

UVC-SCRIGNO COMPOSITE / COMPLETE 6098
UVC-SCRIGNO BOX ONLY/ DRAWERS 6099
UVC-SCRIGNO ONLY/ STERILISER 6097



Dimensions

194 cm ≥33,7 cm →45 cm

Lamps

OZONE FREE selective UVC lamps

Power supply 220v or 110v Electrical absorption 25 watts TMC reduction total microbial load 99% Recommended treatment time 5 mins.

ARTICLE CODE	COLOUR	COMPATIBILITY		
6098	black drawers and sides with all Maletti wood range	universal		
6099	black drawers and sides with all Maletti wood range	universal		
6097	black	universal		

TESTS FOR UVC-SCRIGNO, UVC-SCRIGNOBOX, UVC-MANHATTAN

EXTERNAL LABORATORY TESTS HAVE UNDERLINED THE EFFECTIVENESS IN KILLING 99.9% OF THE BACTERIAL LOAD (CONTAMINATION WITH TWO TYPES OF BACTERIA: E.COLI AND S.AUREUS)

Direttore del Laboratorio Responsabile Settori Microbiologia ed Allergeni (Biologo)





MODENA CENTRO PROVE s.r.l.

Sede legale e <u>Laboratori</u>: 41123 Modena (Italy) - Via Sallustio, 78
Tel. 059822417 r.a. - Fax 059380281 - e-mail: info@modenacentroprove.t: www.modenacentroprove.co
C.C.I.A.A. Modena n. 228887 - Tribunale di Modena n' 2231 - C.F. e P. IVA n. 01592020364

MECCANICA ECOLOGIA CERAMICA AUTOMOTIVE

RISULTATI

I risultati ottenuti sono riassunti nelle due tabelle sottostanti. Per entrambe le superfici in seguito ad un trattamento di 10 minuti la percentuale di abbattimento (R%) ottenuta è stata superiore al 99,9%.

PLASTICA (num. RdP 20LA06215)


CEPPO	TESTIMONE	Campione dopo tratamento di 5 minuti (ufo/provino)	RN	Campione dopo trattamento di 10 minuti (ulciprovino)	R%	Campione dopo trattamento di 15 minuti (ultr/provino)	R%	Campione dopo tratamento di 30 minuti (ulciprovino)	RN	METODO
Escherichia coli ATCC 8739	0,9 x10 ⁶	<10	>99,9	<10	>99,9	<10	>99,9	<10	>99,9	ISO 16649-2:2001
Staphylococcus aureus ATCC 6538	1,0 x10 ⁶	<10	>99,9	<10	>99,9	<10	>99,9	<10	>99,9	UM EN ISO 6889-1:201

ACCIAIO (num. RdP 20LA06216)

CEPPO	TESTIMONE	Campione dopo trattamento di 5 minuti (ufciprovino)	R%	Campione dopo tratamento di 10 minuti (ulciprovino)	R%	Campione dopo trattamento di 1 5 minuti (ufo'provino)	R%	Campione dope waternente di 30 minuti (do provino)	R%	METODO
Escharichia coli ATCC 8739	1,4 ×10 ⁶	«10	>99,9	<10	>99,9	<10	>99,9	<10	>99,9	ISO 16649-2:2001
Staphylococcus nureus ATCC 6538	1,6 x10 ⁰	5,0 x10 ²	99,7	<10	>99,9	<10	>99,9	<10	>99,9	UNI EN ISO 6888 1 2018

UVC-MANHATTAN MANHATTANUV

STERILISING TROLLEY






Dimensions ↑86,5 cm \nearrow 40 cm \rightarrow 35 cm Lamps
0Z0NE FREE selective UVC lamps

Power supply 220v or 110v Electrical absorption 25 watt TMC reduction total microbial load 99% Recommended treatment time 5 mins.

ARTICLE CODE	COLOUR	COMPATIBILITY
MANHATTANUV	black	universal

ECOSTEAM ECOSTEAM

STEAM STERILISER




Dimensions $\uparrow 21,9 \text{ cm} \nearrow 18,5 \text{ cm} \rightarrow 8 \text{ cm}$

Power supply 220v or 110v Electrical absorption 800 watt TMC reduction total microbial load 99%

ARTICLE CODE	COLOUR	COMPATIBILITY
ECOSTEAMBE	beige	universal
ECOSTEAMNE	black	universal

STERYL SEAL N7037

SANITISED INSTRUMENT SEALER




Dimensions \uparrow 27,1 cm \nearrow 36 cm \rightarrow 46 cm

Power supply 220v or 110v Electrical absorption 200 watt

ARTICLE CODE	COLOUR	COMPATIBILITY
N7037	white	universal

AUTOKLAVE N7035

STERILISER



Dimensions $↑30,5 \text{ cm} \nearrow 38,8 \text{ cm} \rightarrow 37,5 \text{ cm}$


Lamps selective UVC lamps TMC reduction total microbial load 99%

Power supply 220v or 110v Electrical absorption 1000 watt

ARTICLE CODE	COLOUR	COMPATIBILITY
N7035	white	universal

HOT CABY SMALL N92711

STERILISER



Dimensions

125,3 cm ≥31,8 cm →33,5 cm

OZONE FREE selective UVC lamps

TMC reduction


total microbial load 99%

Power supply 220V or 110V Electrical absorption 200 watts

ARTICLE CODE	COLOUR	COMPATIBILITY
N92711	white / brown	universal

HOT CABY MEDIUM N80231

STERILISER



Dimensions

134,2 cm ≥35,4 cm →46,1 cm

Lamps

OZONE FREE selective UVC lamps

TMC reduction


total microbial load 99%

Power supply 220V or 110V Electrical absorption 260 watts

ARTICLE CODE	COLOUR	COMPATIBILITY
N80231	white / brown	universal

HOT CABY BIG N70231

STERILISER



Dimensions

155 cm ≥35,5 cm →49,2 cm

Lamps

OZONE FREE selective UVC lamps

TMC reduction

total microbial load 99%

Power supply 220V or 110V Electrical absorption 315 watts

ARTICLE CODE	COLOUR	COMPATIBILITY
N70231	white / brown	universal

GLOBO 6085COV

HOOD FOR WASH UNIT





Dimensions


129,6 cm ≯58 cm →63,3 cm

ARTICLE CODE	COLOUR	COMPATIBILITY
6085C0V	transparent plexiglass	universal

CHROMA

PALETTE 6080

VISOR FOR WASH UNIT 6080VIS




Dimensions

126,31 cm ≥50,3 cm →90 cm

ARTICLE CODE	COLOUR	COMPATIBILITY
6080	hpl black	universal
6080VIS	satin-finished PVC sheet	universal

VISION 6081

PROTECTIVE VISOR BACKPACK




Dimensions

123,7 cm ≥15 cm →42,1 cm

ARTICLE CODE	COLOUR	COMPATIBILITY
6081	transparent plexiglass	universal

TUDOR D 6074

SEPARATOR / DIVIDER



Dimensions


1126,5 cm ≥134 cm →0,8 cm

ARTICLE CODE	COLOUR	COMPATIBILITY
6074	Maletti all wood/skay range	universal

TUDOR M

SEPARATOR / DIVIDER

PLEXI 6071 SKAY 6072



Dimensions


1123,9 cm ≯97 cm →0,8 cm

ARTICLE CODE	COLOUR	COMPATIBILITY
6071	transparent plexiglass	universal
6072	Maletti all wood/skay range	universal

What are **UVC rays?**

THE ELECTROMAGNETIC SPECTRUM

In the electromagnetic spectrum, ultraviolet (UV) lies between the visible band and X ray emissions, or rather at wavelengths in the range of 100 to 400 nanometres (nm, a millionth of a millimetre, 10-6mm). This wavelength interval is further divided into UV-A (320-400 nm); UV-B (280- 320 nm) and UVC (100-280 nm) (Fig.1). Each of these frequency bands has shown to cause different reactions on the living organisms onto which they are emitted.



UV - A: 315nm 400nm (tanning properties) UV - B: 280nm 320nm (therapeutic properties) UV - C: 100nm 280nm (germicidal properties)

UV-A rays are responsible for the tanning and ageing of skin. 95% of solar radiation that reaches the earth's surface at the level of the equator is of the UV-A type.

UV-B rays damage DNA and cause tissue damage and sun rash.

UV-B rays represent 5% of solar radiation that reaches the equator and are biologically much more active than UV-A rays.

UVC rays are germicidal.

UVC rays are largely absorbed by the atmosphere.

UVC RAY GERMICIDAL FUNCTION

Already early last century, in 1929, experiments demonstrated the antibacterial capacity of UVC ultraviolet rays (1). The absorption of photons in this wavelength band would cause bacterial cells to die (Fig.2). The mode of action has been shown to be the absorption of UVC light photons by the DNA or RNA of micro-organisms.

This absorption causes alterations to the DNA or RNA structure, modifying the structure of the nucleic acid, hindering normal duplication mechanisms and inducing cell death.




Figure 2. Mode of action at the heart of UV disinfection or sanitisation.

Bacteria, viruses, spores and protozoans are subjected to the UVC germicidal action.

More recently, it has also been proved that UVC rays at a specific wavelength of 207-222nm, known as far-UVC, effectively inactivate micro-oårganisms without damaging the exposed skin.

CAN UVC RAYS PREVENT THE TRANSMISSION OF COVID-19?

The answer to this and other questions can be found in the "IUVA Fact Sheet on UV Disinfection for COVID-19" published by the International Ultraviolet Association (IUVA).

UVC light is widely used, particularly since mercury steam lamps, which have good emission in this part of the spectrum, have become more accessible and are used in systems to decontaminate and disinfest water, air, pharmaceutical products and surfaces to prevent a whole series of human pathogens.

All bacteria and viruses tested up until now (several hundred over the course of the years), including other coronaviruses, respond to UVC disinfection. UV light, specifically between 200 and 280 nm, inactivates (or rather kills) at least another two viral agents that are genetically similar to the Covid-19 virus:

SARS-CoV-1 (the cause of SARS);

MERS-CoV (responsible for Middle East Respiratory Syndrome).

Recent work has also demonstrated the effectiveness of UVC rays on the Covid-19 virus.


As things stand, the use of UVC rays is an effective way to prevent the spread and virulence of the Covid-19 virus.

In particular, the sanitisation of spaces (air, surfaces, work tools) is fundamental in order to contain the pandemic.


to find out more:

- 1. James Bolton, Christine Colton, The Ultraviolet Disinfection Handbook, American Water Works Association, 2008 ISBN 9781 58321 584 5, pp. 3–4
- 2. Parrish JA, Anderson RR, Urbach F, et al. UV-A: Biological Effects of Ultraviolet Radiation with Emphasis on Human Responses to Longwave Ultraviolet, New York, NY: Plenum Press; 1978: cap 1.

medical medical	J	L

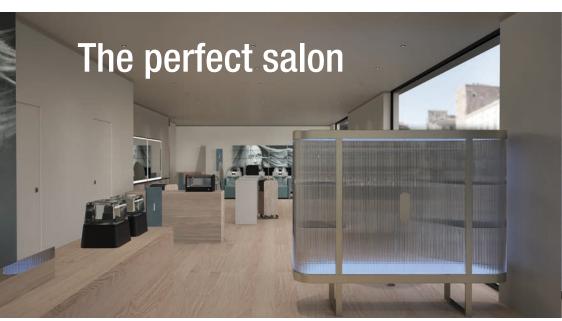




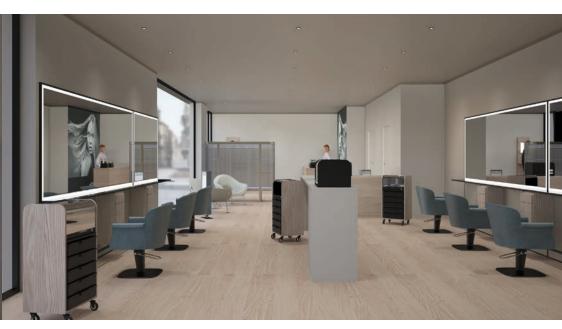



With 100%SAFE your salon is "virus free" certified

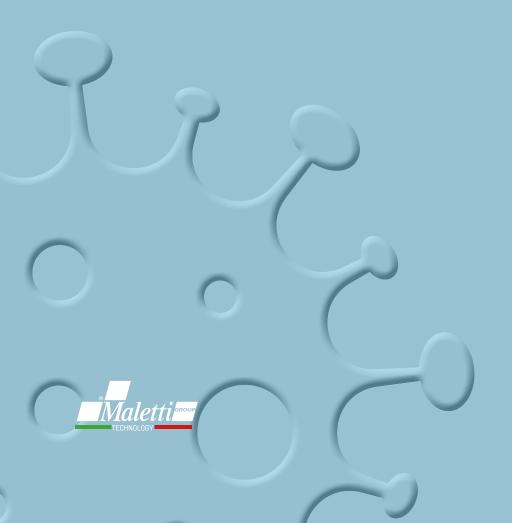


The products presented in this catalogue are all made in Italy and patented by Maletti Group.

Display the sticker at your entrance and certify the safety of your spaces.







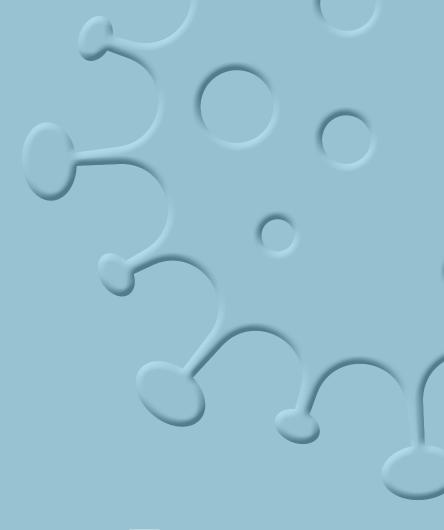



MALETTI GROUP
Piazzale Guerrino Maletti, 1
42019 Scandiano (RE) - Italy
tel. +39 0522 7631
fax +39 0522 983344
info@malettigroup.com
www.malettigroup.com